



GreenLine V2 Solar

solarEquip.BRP4090821WMAXCWMRPCS112VPROG

Configure lumen pack, change the dimming profile, monitor health, read analog parameters from ground level using simple easy to use android app.

Product data

General Information		Approval and Application	
Driver included	Yes	Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Optical cover/lens type	Polycarbonate	Mech. impact protection	IK05 [0.7 J]
Control interface	BLE	code	
Cable	Cord 0.5 m 4 core for battery and panel, without connectors and additional 1.0 m cable for solar panel included in the box	Initial Performance (IEC Compliant)	
Warranty period	3 years	Init. Corr. Color	5700 K
Material	Pressure die cast aluminum	Temperature	
Operating and Electrical		Init. Color Rendering	>70
Charge controller type	MPPT	Index	
Charge controller wattage	21 W	Over Time Performance (IEC Compliant)	
Cable connection kit	Included	Median useful life	50000 h
Controls and Dimming		L70B50	
Dimmable	Yes	Application Conditions	
Configurability	Configurable	Ambient temperature range	0 to +35 °C
Mechanical and Housing		Solar dimming profile	Configurable through mobile app
Overall length	416 mm	Grid connection type	Hybrid
Overall width	203 mm	Battery location	Outside Luminaire
Overall height	75 mm	Product Data	
		Order product name	solarEquip.BRP4090821WMAXCWMRPCS112VPROG

GreenLine V2 Solar

Order code 919515811042

Numerator - Quantity 1

Per Pack

Numerator - Packs per 1

outer box


Material Nr. (12NC) 919515811042

Net Weight (Piece) 2.700 kg



Dimensional drawing

Dimensions

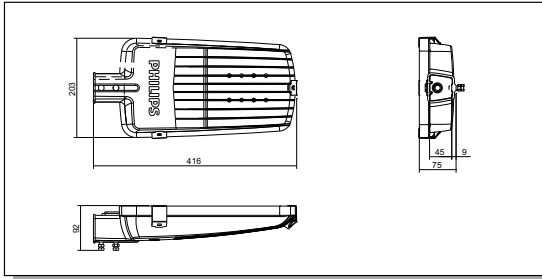

Solar Street Lights

