



DuraLED Highbay

BY326P P LED120S CW PSU HO GR SY110 FG S

Philips DuraLED Highbay is a functional lighting by combining cost-efficiency with clean design. Following the success of Maxolid family, DuraLED Highbay comes as a big surprise gift for industrial Highbay lighting solution with desirable preposition that offers customers all the benefits of LED lighting – fresh light quality, longer service lifetime, reduced energy consumption and less maintenance – from a trusted manufacturer. At the same time, it delivers clear benefits for the installer too. The luminaire can be installed on the existing grid. Electrical connection is straightforward: there is no need to open the luminaire for installation. DuraLED Highbay is a perfect LED replacement for HPI 250/400W luminaires, allowing you to bright up your warehouses, assembly lines, supermarkets, and sports recreational spaces in a smarter way. This highbay improves the total cost of ownership and provides optionally DALI dimming for even further savings.

Warnings and Safety

- Meant for use in Indoor Industrial environment only

Product data

General Information		Material	
Beam angle of light source	55°	Material	Aluminum
Light source color	757 cool white	Light source engine type	LED
Driver included	Yes	Operating and Electrical	
Optic type	110 [Beam angle 110°]	Input Voltage	120 to 277 V
Optical cover/lens type	GT [Tempered glass]	Input Frequency	50 Hz
Luminaire light beam spread	110°	Power Factor (Min)	0.95
Control interface	-	Controls and Dimming	
Protection class IEC	Safety class I (I)	Dimmable	No
Flammability mark	F [For mounting on normally flammable surfaces]		
Warranty period	2 years		

DuraLED Highway

Mechanical and Housing

Housing Material	Aluminum die-cast
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Mounting device	Eye-Bolt
Optical cover/lens shape	Wide
Color	Gray

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Surge Protection (Common/Differential)	Surge protection level until 10 kV

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	12000 lm
Initial LED luminaire efficacy	110 lm/W
Init. Corr. Color Temperature	5700 K
Init. Color Rendering Index	>70
Initial chromaticity	<5

Initial input power	105 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
---------------------------	---------

Application Conditions

Ambient temperature range	0 to +45 °C
---------------------------	-------------


Product Data

Order product name	BY326P P LED120S CW PSU HO GR SY110 FG S
Order code	919615810936
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	919615810936
Net Weight (Piece)	6.750 kg



Dimensional drawing

Product: DuraLED Highway
Type: BY326P
Application: Indoor Industrial Application

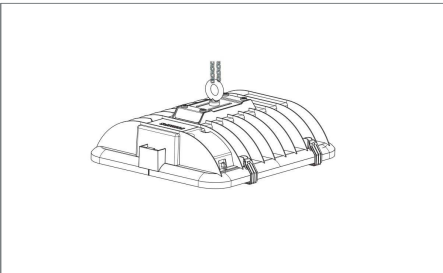

Indoor Luminaires

