



MASTER PL-C 2 Pin

MASTER PL-C 13W/827/2P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information			
Cap-Base	G24D-1 [G24d-1]	Luminous Flux (Nom)	925 lm
Life To 10% Failures (Nom)	6500 h	Luminous Flux (Rated) (Nom)	925 lm
Life to 50% Failures (Nom)	10000 h	Color Designation	Incandescent White
LSF 2000 h Rated	99 %	Chromaticity Coordinate X (Nom)	0.463
LSF 4000 h Rated	98 %	Chromaticity Coordinate Y (Nom)	0.42
LSF 6000 h Rated	92 %	Correlated Color Temperature (Nom)	2700 K
LSF 8000 h Rated	78 %	Luminous Efficacy (rated) (Nom)	69 lm/W
Flux measurement reference	Sphere	Color Rendering Index (Nom)	82
Light Technical		LLMF 2000 h Rated	92 %
Color Code	827 [CCT of 2700K]	LLMF 4000 h Rated	87 %
		LLMF 6000 h Rated	83 %

MASTER PL-C 2 Pin

LLMF 8000 h Rated	81%
Operating and Electrical	
Power (Rated) (Nom)	13.8 W
Lamp Current (Nom)	0.170 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2P
Approval and Application	
Energy Efficiency Class	G

Mercury (Hg) Content (Max)	1.4 mg
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	14 kWh
EPREL Registration Number	423278
Product Data	
Full product code	871150062081170
Order product name	MASTER PL-C 13W/827/2P 1CT/5X10BOX
EAN/UPC - Product	8711500620811
Order code	927904882740
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927904882740
Net Weight (Piece)	53.600 g
ILCOS Code	FSQ-13/27/1B-I-G24d=1


Dimensional drawing




PL-C 13W/827/2P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 13W/827/2P 1CT/5X10BOX	27.1 mm	27.1 mm	97.5 mm	117.0 mm	139.4 mm

Photometric data

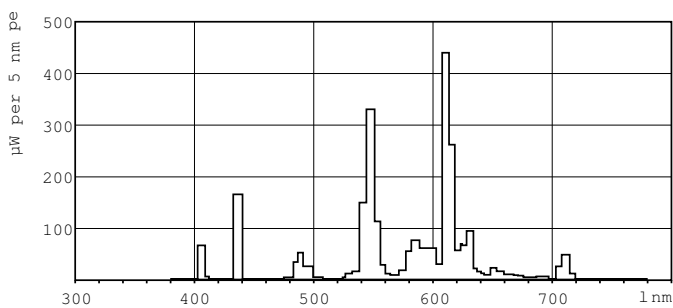

Lightcolor /827

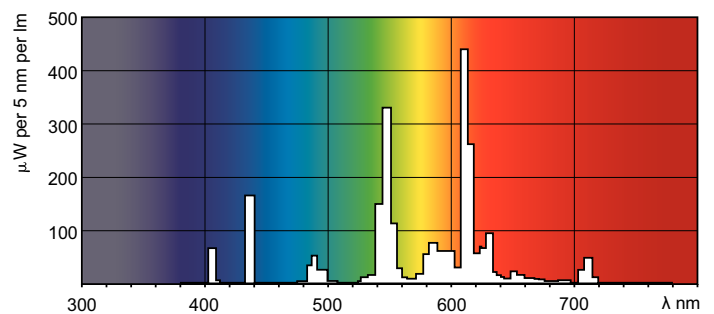


Lightcolor /827

MASTER PL-C 2 Pin

Lifetime



Life Expectancy 3 h cycle

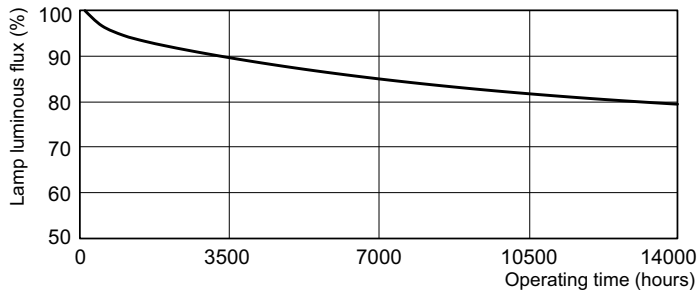

Life Expectancy 12 h cycle

Lumen Maintenance 3h + 12 h cycle

